



People who serve, products that solve.™

GLO-RAY® GRS **PORTABLE** HEATED SHELF



Hatco heated shelves are the benchmark for quality, reliability and style when it comes to holding food at serving temperatures with built-in adjustable thermostat.

Choose these portable table-top models to suit any project or venue requirement, and serve with style and practicality.

Convenient portable heated shelf units that offer the flexibility of use when and where needed.
Shown below with optional pan guards. Designer colours to order.

CODE	DIMENSIONS	WATTS
GRS-18-I	457 mm long x 495 mm wide	272
GRS-24-I	610 mm long x 495 mm wide	380
GRS-30-I	762 mm long x 495 mm wide	490
GRS-36-I	914 mm long x 495 mm wide	598
GRS-42-I	1067 mm long x 495 mm wide	652
GRS-48-I	1219 mm long x 495 mm wide	760
GRS-54-I	1372 mm long x 495 mm wide	870
GRS-60-I	1524 mm long x 495 mm wide	980
GRS-66-I	1676 mm long x 495 mm wide	1088
GRS-72-I	1829 mm long x 495 mm wide	1196

All the above supplied with 10amp plug.




GLO-RAY® GRS **PORTABLE** HEATED SHELF



GLO-RAY® HEATED SHELVES

Models GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

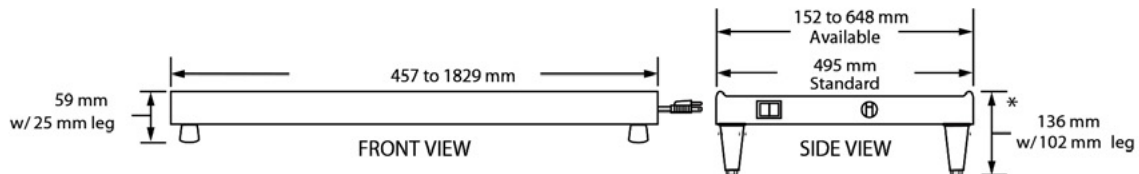

SPECIFICATIONS FOR STANDARD 19.5 (495 mm) DEPTH

Model	Watts	Width	Shipping Weight
GRS-18-I	250	457	7 kg
GRS-24-I	350	610	9 kg
GRS-30-I*	450	762	11 kg
GRS-36-I	550	914	13 kg
GRS-42-I†	600	1067	15 kg
GRS-48-I†	700	1219	16 kg
GRS-54-I†	800	1372	19 kg
GRS-60-I†	900	1524	20 kg
GRS-66-I†	1000	1676	23 kg
GRS-72-I†	1100	1829	25 kg

* Indicates models that accommodate multiple food pans:

762 mm = 2 pans,
1067 mm = 3 pans,
1372 mm = 4 pans,
1676 mm = 5 pans.

† NSF requires units over 914 mm in width or weighing more than 36 kg to be either sealed, or raised on the installation surface with the 102 mm legs included.

DIMENSIONS

GRS (Standard Depth): Model shown is 457 to 1829 x 495 x 59mm.*

*Add 76mm to height when using 102mm legs.

VOLTAGE

240V 50Hz single phase

CORD LOCATION

Is on the same end as the switch

All units come with a 1829mm Cord and 10Amp plug

GRS Models are available in depths of:

Model	Depths	Model	Depths
A	152 mm	G	400 mm
B	197 mm	H	445 mm
C	248 mm	I	495 mm
D	305 mm	J	546 mm
E	349 mm	K	597 mm
F	394 mm	L	648 mm

WATTS

Model	A	B	C	D	E	F	G	H	I	J	K	L
GRS-18-(X)	100	100	125	200	200	200	225	225	250	300	325	350
GRS-24-(X)	125	125	175	250	250	250	300	300	350	375	425	475
GRS-30-(X)	150	150	225	300	300	300	375	375	450	450	525	600
GRS-36-(X)	175	175	275	350	350	350	450	450	550	525	625	725
GRS-42-(X)	225	225	300	450	450	450	525	525	600	675	750	825
GRS-48-(X)	250	250	350	500	500	500	600	600	700	750	850	950
GRS-54-(X)	275	275	400	550	550	550	675	675	800	825	950	1075
GRS-60-(X)	300	300	450	600	600	600	750	750	900	900	1050	1200
GRS-66-(X)	325	325	500	650	650	650	825	825	1000	975	1150	1325
GRS-72-(X)	350	350	550	700	700	700	900	900	1100	1050	1250	1450