



People who serve, products that solve.™

HEATED BUILT-IN WELLS

HWB-FULD rectangular & HWB-QTD round models

Hatco Built-In Heated Wells hold heated foods at safe serving temperatures.

Compared to other models, these Hatco units offer insulated wells for better heat retention, larger drains with flat well screens, more consistent holding temperatures through superior element design, heavier stainless steel construction, easier-to-service design for quick-change of components, and a remote thermostat with separate power switch. Available in wet or dry operation.

Available in rectangular and round models, all units are supplied with a control panel and connected with a 918mm flexible conduit for remote mounting and come with 3/4" NPT drain hole.



HWB-FULD pictured with accessory food pan (not supplied).



Convenient separate On-Off control and thermostat.



Round Built-in wells 4QT, 7QT and 11QT models.



Optional pan inserts and lids.



People who serve, products that solve.™


SPECIFICATIONS

HWB-FULD rectangular & HWB-QTD round models


| CODE | DESCRIPTION | KW | AMP |
|-----------|--|-------|-------------|
| HWB-4QTD | 4 Quart (3.8Litre) Heated Well with 3/4" NPT drain hole. | 0.6kw | 10 amp plug |
| HWB-7QTD | 7 Quart (6.65L) Heated Well with 3/4" NPT drain hole. | 0.6kw | 10 amp plug |
| HWB-11QTD | 11 Quart (10.41L) Heated Well inc. 3/4" NPT drain hole. | 0.6kw | 10 amp plug |

| CODE | DESCRIPTION |
|--------------|---|
| 4QT-PAN&LID | 4 Quart (3.8L) Round Well and Notched Lid. |
| 7QT-PAN&LID | 7 Quart (6.65L) Round Well and Notched Lid. |
| 11QT-PAN&LID | 11 Quart (10.41L) Round Well and Notched Lid. |

HWB-4QT Series
(209 mm)
HWB-7QT Series
(262 mm)
HWB-11QT Series
(313 mm)




FRONT VIEW




Standard Compact Thermostatic Control
(with bezel)

HWB-4QT Series
(256 mm)
HWB-7QT Series
(228 mm)
HWB-11QT Series
(228 mm)

SIDE VIEW

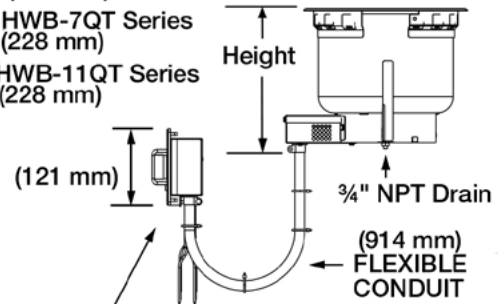


Non-Combustible
Countertop
Opening
("Circular" cut-out)



Cutout Dimensions for Non-Combustible Countertop

| Model | Minimum Diameter (A) | Maximum Diameter (A) |
|----------|----------------------|----------------------|
| HWB-4QT | (181 mm) | (192 mm) |
| HWB-7QT | (232 mm) | (243 mm) |
| HWB-11QT | (282 mm) | (294 mm) |

Combustible
Countertop
Opening
("Square" cut-out)



Cutout Dimensions for Combustible Countertops ▲ Accessory Mounting Kit required

| Model | Minimum Width (A) | Maximum Width (A) | Minimum Width (B) | Maximum Width (B) |
|----------|-------------------|-------------------|-------------------|-------------------|
| HWB-4QT | (229 mm) | (235 mm) | (229 mm) | (235 mm) |
| HWB-7QT | (279 mm) | (286 mm) | (279 mm) | (286 mm) |
| HWB-11QT | (330 mm) | (337 mm) | (330 mm) | (337 mm) |

NOTE: all units supplied with 3/4" NPT thread drain hole. Drain not supplied.

▲ Accessory Mounting Kit required

| CODE | DESCRIPTION | KW | AMP |
|----------|--|-------|-------------|
| HWB-FULD | Heated Well with 3/4" NPT drain hole Suits 1/1 GN Pan. | 1.2kw | 10 amp plug |

DIMENSIONS (W x D x H)

HWB-FULD Series: 348 W x 553 D x 218 Hmm

HWB-4QT Series: 209 Diameter x 241 Hmm.

HWB-7QT Series: 262 Diameter x 221 Hmm.

HWB-11QT Series: 311 Diameter x 213 Hmm.

CONTROL PANEL DIMENSIONS

Recessed: 161 W x 92 D x 196 Hmm.

Control Panel Cut-Out: 149 W x 162 Hmm.

Built-in and Drop-in Heated Wells Countertop Cutout Dimensions

| Model Series | Minimum Width | Maximum Width | Minimum Depth | Maximum Depth | Below Counter |
|--------------|---------------|---------------|---------------|---------------|---------------|
| HWB-FUL | (321 mm) | (328 mm) | (524 mm) | (532 mm) | (218 mm) |
| HWB-FUL* | (356 mm) | (362 mm) | (559 mm) | (565 mm) | (218 mm) |

* Indicates dimensions for combustible surface

NOTE: all units supplied with 3/4" NPT thread drain hole. Drain not supplied.

Due to our policy of continuous product development, all specifications are subject to change without notice.